

AQUAJETDP 505/750 自动自吸深井泵 AUTOMATIC DEEP WELL SELF-PRIMING JET PUMP



CONSTRUCTION

PUMP: Centrifugal Self-Priming JET / Twin Impellers
 Pump Body: Cast Iron
 Impeller: Brass / P.P.O. Plastics / Stainless Steel
 Mechanical Seal: Carbon + Ceramic + Stainless Steel
 Front cover: Cast Iron

MOTOR: Single Phase Heavy Duty Continuous Work
 Motor Housing: Aluminium
 Shaft: Carbon Steel / 304 Stainless Steel Welded
 / 420 Stainless Steel
 Insulation: Class B / Class F
 Protection: IP44 / IP54
 Cooling: External ventilation



结构特征

泵: 双叶轮离心自吸式喷射泵
 泵体: 铸铁
 叶轮: 铜/PPO塑料/不锈钢(可选)
 机械密封: 石墨+陶瓷+不锈钢+橡胶
 前端盖: 铸铁


电机: 单相大马力连续工作制
 电机机座: 铝压铸
 转轴: 45#碳钢/304不锈钢焊接轴/整轴420不锈钢
 绝缘等级: B级/F级
 防护等级: IP44/IP54
 冷却方式: 风冷




AQUAJETDP505A
AQUAJETDP750A

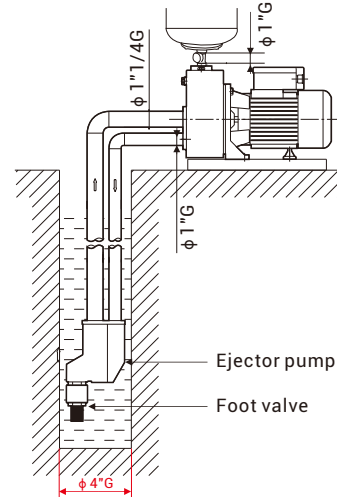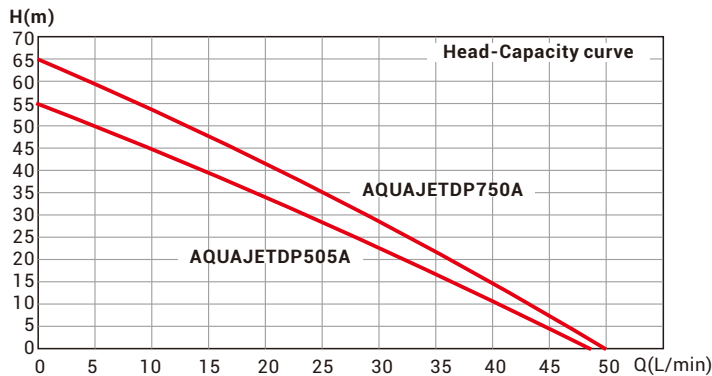

技术参数 PERFORMANCE SPECIFICATIONS

型号 Model	功率 Power		电流 Ampere (A)	喷射型号 Ejector Type	n=2850r/min			进口/出口 Inlet/Outlet (mm)	包装尺寸及毛重 PACKAGE DIMENSIONS & G.W.						
					最大吸程 Suct.max	最大流量 Q.max	最大扬程 H.max		长 L	宽 W	高 H	重量 KG	1X20"柜数量 1X20"FCL QTY (pcs)		
	HP	kW	220V/50Hz		(m)	(L/min)	(m)								
AQUAJETDP505A	0.75	0.55	5.2	E25	21	48	55	25 × 30 × 25	525	250	300	31	700		
				E30	27	40	60								
AQUAJETDP750A	1.0	0.75	4.3	E25	24	50	65	25 × 30 × 25	525	250	300	32	700		
				E30	27	45	70								



*110V,110/220V,60Hz etc. Models are available on request.