

KAP 深井自吸喷射流泵 DEEP WELL SELF-PRIMING JET PUMP



CONSTRUCTION

PUMP: Centrifugal - Self Priming JET (Double Suction)

Pump Body: Cast Iron

Impeller: Brass / P.P.O. Plastics

Mechanical Seal: Carbon + Ceramic + Stainless steel + Rubber

Front cover: Cast Iron

MOTOR: Single Phase Heavy Duty Continuous Work

Motor Housing: Aluminium

Shaft: Carbon Steel / 304 Stainless Steel Welded
/ 420 Stainless Steel

Insulation: Class B / Class F

Protection: IP44 / IP54

Cooling: External ventilation

结构特征

泵: 离心自吸式喷射泵

泵体: 铸铁

叶轮: 铜/P.P.O.塑料(可选)

机械密封: 石墨+陶瓷+不锈钢+橡胶

前端盖: 铸铁

电机: 单相大马力连续工作制

电机机座: 铝压铸

转轴: 45#碳钢/304不锈钢焊接轴/整轴420不锈钢

绝缘等级: B级/F级


防护等级: IP44/IP54

冷却方式: 风冷

包装尺寸及毛重

PACKAGE DIMENSIONS & G.W.

型号 Model	长 L	宽 W	高 H	重量 KG	1X20"柜数量 1X20" FCL QTY (pcs)
KAP 75	440	200	225	16.7	1450
KAP 100	440	200	225	18	1450




安装尺寸图请查看61页。

For installation dimensions, please reference to page 61.

(Ejector I)

KAP75
KAP100

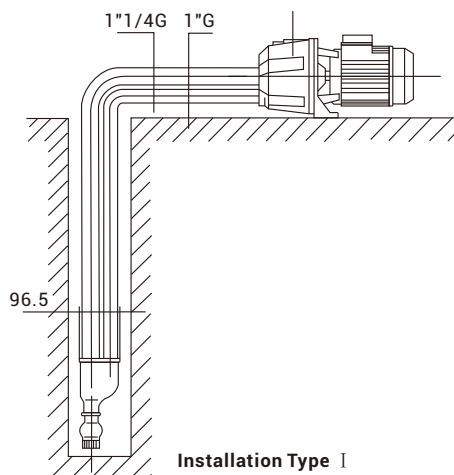

Installation Type I

技术参数 PERFORMANCE SPECIFICATIONS

型号 Model	功率 Power		电流 Ampere (A)	喷射型号 Ejector Type	最大吸程 Suct.max (m)	进出口管径 Inlet/Outlet DIA	流量 Q=capacity								
							m³/h	0.18	0.36	0.6	0.9	1.2	1.5	1.8	2.1
	HP	kW	220V/50Hz				l/min	3	6	10	15	20	25	30	35
	扬程 H (m)														
KAP 75	0.8	0.6	3.7	P20	15	1.25"x1"x1"	31	28	25	22	19	17	15	12	
					20	1.25"x1"x1"	28	23	18	15	13	11	-	-	
				P30	25	1.25"x1"x1"	22	16	11	8	-	-	-	-	-
					30	1.25"x1"x1"	14	8	-	-	-	-	-	-	-
KAP 100	1	0.75	4.7	P20	15	1.25"x1"x1"	40	37	34	30	27	24	21	17	
					20	1.25"x1"x1"	37	34	30	25	21	17	-	-	-
				P30	25	1.25"x1"x1"	30	25	20	14	11	-	-	-	-
					30	1.25"x1"x1"	14	8	-	-	-	-	-	-	-
					35	1.25"x1"x1"	12	4	-	-	-	-	-	-	-

*110V,110/220V,60Hz etc. Models are available on request.

KAP 深井自喷射流泵

DEEP WELL SELF-PRIMING JET PUMP

CONSTRUCTION

PUMP: Centrifugal - Self Priming JET / Twin Impellers (Double Suction)

Pump Body: Cast Iron

Impeller: Brass / P.P.O. Plastics

Mechanical Seal: Carbon + Ceramic + Stainless steel + Rubber

Front cover: Cast Iron

MOTOR: Single Phase Heavy Duty Continuous Work

Motor Housing: Aluminium

Shaft: Carbon Steel / 304 Stainless Steel Welded
/ 420 Stainless Steel

Insulation: Class B / Class F

Protection: IP44 / IP54

Cooling: External ventilation

结构特征

泵：离心自吸式喷射泵

泵体：铸铁

叶轮：铜/P.P.O.塑料(可选)

机械密封：石墨+陶瓷+不锈钢+橡胶

前端盖：铸铁

电机：单相大马力连续工作制

电机机座：铝压铸

转轴：45#碳钢/304不锈钢焊接轴/整轴420不锈钢

绝缘等级：B级/F级


防护等级：IP44/IP54

冷却方式：风冷

包装尺寸及毛重

PACKAGE DIMENSIONS & G.W.

型号 Model	长 L	宽 W	高 H	重量 KG	1X20"柜数量 1X20"FCL QTY (pcs)
KAP 150	440	200	225	16.7	700
KAP 200	440	200	225	18	700




安装尺寸图请查看61页。

For installation dimensions, please reference to page 61.

技术参数 PERFORMANCE SPECIFICATIONS


型号 Model	功率 Power		电流 Ampere (A)	喷射型号 Ejector Type	最大吸程 Suct.max (m)	进出口管径 Inlet/Outlet DIA	流量 Q=capacity									
							m³/h	0.18	0.36	0.6	0.9	1.2	1.5	1.8	2.1	3.0
	HP	kW	220V/50Hz				l/min	3	6	10	15	20	25	30	35	50
扬程 H (m)																
KAP 150	1.5	1.1	8.2	P20	15	1.25"x1"x1"		-	-	-	-	-	42	35	25	21
					20	1.25"x1"x1"		-	-	-	-	50	37	30	21	-
					25	1.25"x1"x1"		-	-	-	-	45	34	27	-	-
				P30	35	1.25"x1"x1"		-	-	49	41	20	-	-	-	-
					40	1.25"x1"x1"		-	48	40	-	-	-	-	-	-
					50	1.25"x1"x1"		49	43	20	-	-	-	-	-	-
KAP 200	2.2	1.65	10.3	P20	15	1.25"x1"x1"		-	-	-	-	-	-	46	35	30
					20	1.25"x1"x1"		-	-	-	-	-	48	43	32	27
					25	1.25"x1"x1"		-	-	-	-	50	44	40	28	23
				P30	35	1.25"x1"x1"		-	-	-	-	-	28	20	-	-
					40	1.25"x1"x1"		-	-	46	-	-	-	-	-	-
					50	1.25"x1"x1"		-	49	40	30	-	-	-	-	-


*110V,110/220V,60Hz etc. Models are available on request.

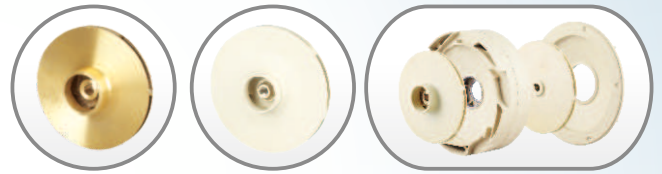


(Ejector II)

KAP150
KAP200

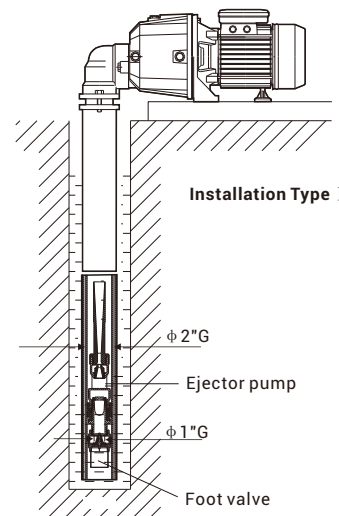


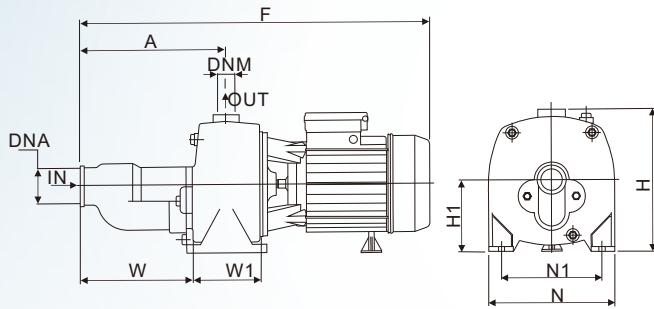


KAB Series

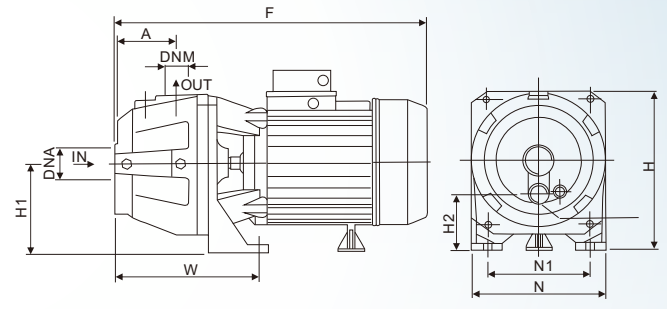

KAP Series

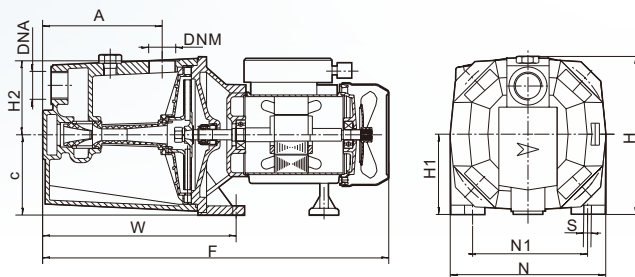

KJM, KM-80, KJ-100M Series

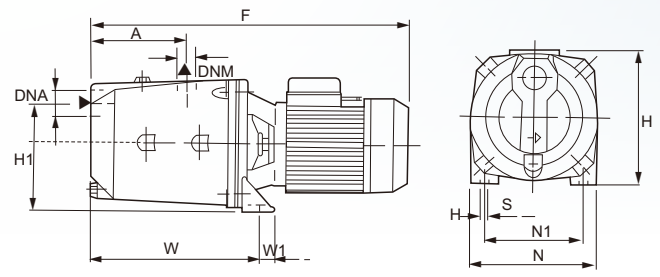

KJ-200M Series

安装尺寸 INSTALLATION DIMENSIONS

型号 Model	尺寸 DIMENSIONS (mm)											
	A	F	H	H1	H2	H3	H4	N	N1	W	W1	S
KAB150	257	596	240	112	-	-	-	220	177	204	105	10
KAB200	257	596	240	112	-	-	-	220	177	204	105	10
KAB300	257	596	240	112	-	-	-	220	177	204	105	10
KAP75	82	360	195	185	52	-	-	180	140	168	-	10
KAP100	82	360	195	185	52	-	-	180	140	168	-	10
KAP150	74	415	230	240	60	-	-	220	177	125	-	10
KAP200	74	415	230	240	60	-	-	220	177	125	-	10
KJM50	140	420	195	90	95	185	-	180	140	230	-	10
KJM75	140	420	195	90	95	185	-	180	140	230	-	10
KJM100	140	420	195	90	95	185	-	180	140	230	-	10
KM-60	140	435	220	100	95	185	-	180	140	230	-	10
KM-70	140	435	220	100	95	185	-	180	140	230	-	10
KM-80	140	435	220	100	95	185	-	180	140	230	-	10
KJ-102M	106	420	108	94	80	174	145	170.5	111	192	-	9
KJ-80M	140	440	220	100	90	190	-	181	140	235	-	10
KJ-100M	140	440	220	100	90	190	-	181	140	235	-	10
KJ-200M	151	521	227	175	-	-	-	214	160	282	20	11
KJ-300M	151	521	227	175	-	-	-	214	160	282	20	11
KDP-100	100	395	210	45	90	-	-	176	140	145	-	10
KDP-151	54	410	270	112	-	-	-	192	146	118	-	10
KDP-251	54	410	270	112	-	-	-	192	146	118	-	10