


KDB 清水泵 CLEAN WATER PUMP

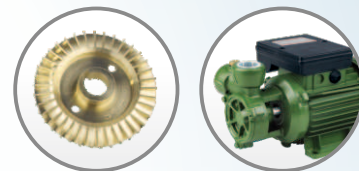

CONSTRUCTION

PUMP: Peripheral

Pump Body with Front Cover: Cast Iron / Cast Iron with Brass
Impeller: Brass
Pump Cover: Cast Iron / Brass
Mechanical Seal: Carbon + Ceramic + Stainless steel + Rubber

MOTOR: Single Phase Heavy Duty Continuous Work

Motor Housing: Aluminium
Shaft: Carbon Steel / 304 Stainless Steel Welded / 420 Stainless Steel
Insulation: Class B / Class F
Protection: IP44 / IP54
Cooling: External ventilation

结构特征

泵：旋涡式清水泵


泵体前盖一体：铸铁
叶轮：铜
泵盖：铸铁/铜
机械密封：石墨+陶瓷+不锈钢+橡胶

电机：单相大马力连续工作制

电机机座：铝压铸
转轴：45#碳钢/304不锈钢焊接轴/整轴420不锈钢
绝缘等级：B级/F级
防护等级：IP44/IP54
冷却方式：风冷




KDB-125A

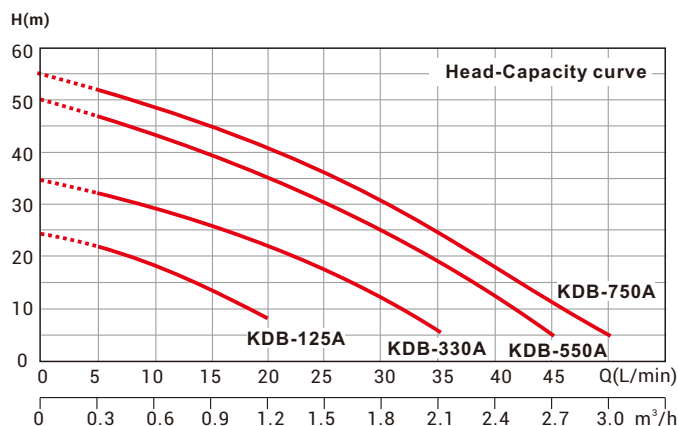

包装尺寸及毛重

PACKAGE DIMENSIONS & G.W.

型号 Model	长 L	宽 W	高 H	重量 KG	1X20"柜数量 1X20"FCU QTY (pcs)
KDB-125A	280	165	180	4.8	3400
KDB-330A	280	165	180	5.2	3400
KDB-550A	335	180	200	9	2300
KDB-750A	335	180	200	10	2300



安装尺寸图请查看55页。


For installation dimensions, please reference to page 55.

技术参数 PERFORMANCE SPECIFICATIONS


型号 Model	功率 Power		电流 Ampere (A)	最大吸程 Suct.max (m)	进出口管径 Inlet/Outlet DIA	流量 Q=capacity											
						m³/h	0	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0
	l/min	0	5			10	15	20	25	30	35	40	45	50			
	扬程 H (m)																
KDB-125A	0.16	0.125	1.3	9	1"x1"	24	20	16	12	8	-	-	-	-	-	-	
KDB-330A	0.5	0.37	2.5		1"x1"	35	32	28	24	20	15	10	5	-	-	-	
KDB-550A	0.75	0.55	3.8		1"x1"	50	44	39	34	27.5	22.5	18	14	9	5	-	
KDB-750A	1	0.75	5.2		1"x1"	55	51	47	43	38	33	27.5	22	16.5	11	5	

*110V,110/220V,60Hz etc. Models are available on request.


清水泵系列 CLEAN WATER PUMP SERIES

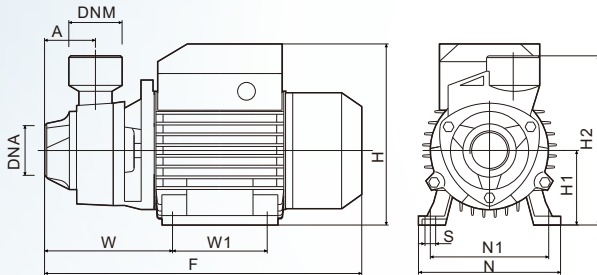


KP, IDB, KFP0, KRP, KP-60C Series

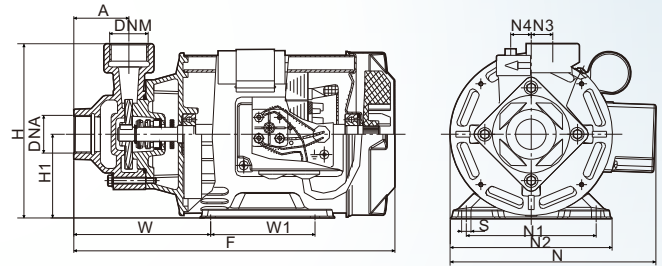

CP-130 Series

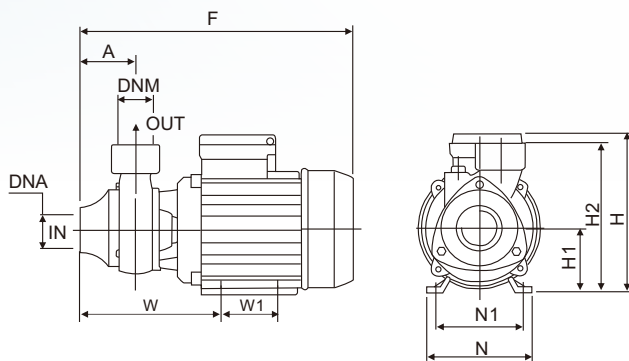

KPM Series

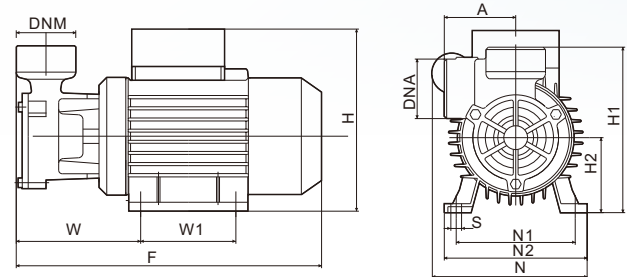

KDB, KFP1 Series

安装尺寸 INSTALLATION DIMENSIONS

型号 Model	尺寸 DIMENSIONS (mm)												
	A	F	H	H1	H2	N	N1	N2	N3	N4	W	W1	S
1KP-60	45	265	152	63	138	118	100	-	-	-	110	80	10
1KP-70	50	305	181	71	156	136	112	-	-	-	122	90	10
1KP-80	50	305	181	71	156	136	112	-	-	-	122	90	10
1.5KP-90	68	380	182	80	175	180	162	-	-	-	138	100	10
IDB-35	50	268	155	63	143	142	100	-	-	-	115	80	10
IDB-40	55	305	176	71	152	155	112	-	-	-	120	90	10
IDB-50	55	305	176	71	152	155	112	-	-	-	120	90	10
IDB-60	68	380	182	80	156	180	130	-	-	-	138	100	10
CP130(PM16)	47.5	277	150	72	-	178	112	139	20	18	118	90	8
KPM-45	50	265	155	63	143	120	97	-	-	-	67	80	10
KPM-60	50	290	172	71	156	135	112	-	-	-	71.5	90	10
KPM-80	50	290	172	71	156	135	112	-	-	-	71.5	90	10
KDB-125A	60	256	154	143	63	118	110	118	-	-	-	101	10
KDB-330A	60	256	154	143	63	118	110	118	-	-	-	101	10
KDB-550A	72	305	176	176	71	136	112	136	-	-	-	122	10
KDB-750A	72	305	176	176	71	136	112	136	-	-	-	122	10
KFP0	35	215	166	63	143	120	100	-	-	-	60	80	7
KFP1	23	225	166	109	143	120	100	-	-	-	68	80	7
KRP-16M	42	247	158	63	138	132	65	-	-	-	64	-	8
KP-60C	22.5	198	158	63	153	122	100	-	-	-	40.5	80	7